

EASYFIT

IMPACT BOLLARD

D140 - H500



TECHNICAL FEATURES

-  **Material:** Tecklene® (technical polymer)
-  **Operating temperature:** -40°C ÷ +50°C | -40°F ÷ +122°F
-  **Flame behaviour:** Tecklene® extinguishing degree (UL 94): HB
-  **UV resistance:** DIN EN ISO 877 7-8 blue scale
-  **Water Absorption:** 0,2%
-  **Energy Class:** 3 - 7500 Joules **TESTED and CERTIFIED according to UNI 11886 STANDARD**
-  **Anchoring system:** Metal Plate with 4 dowels

SAFETY COMPLIANCE


- Dir. 89/391/CEE
- dLGS. 81/08 (UNIFIED SAFETY CHARTER)
- UNI/TS 11886-1 2022
- BSI PAS 13:2017
- UNI EN 15512
- Reg. 852/2004/CE

FOOD CONTACT SAFETY •

- EU: EC Regulation 10/2011 CE
- USA: FDA Regulation 21 CFR 177.1520
- NSF/ANSI Standard 51

 Referred to the Tecklene® polymer

INCLUDED COMPONENTS

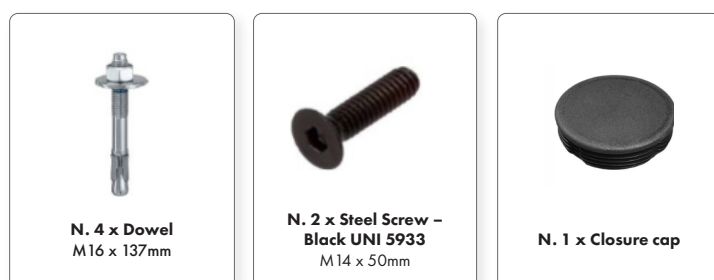

DIMENSIONS

AVAILABLE MODELS*

HEIGHT

500 mm

*other options and models are available upon request.

