

EASYFIT

IMPACT GUARDRAIL

H215



TECHNICAL FEATURES

	Material:	Tecklene® (technical polymer)
	Operating temperature:	-40°C ÷ +50°C -40°F ÷ +122°F
	Flame behaviour:	Tecklene® extinguishing degree (UL 94): HB
	UV resistance:	DIN EN ISO 877 7-8 blue scale
	Water Absorption:	0,2%
	Energy Class:	2 - 5000 Joules TESTED and CERTIFIED according to UNI 11886 STANDARD
	Anchoring system:	Dowel-based fixing

SAFETY COMPLIANCE


- Dir. 89/391/CEE
- dLGS. 81/08 (UNIFIED SAFETY CHARTER)
- UNI/TS 11886-1 2022
- BSI PAS 13:2017
- UNI EN 15512
- Reg. 852/2004/CE

FOOD CONTACT SAFETY

- EU: EC Regulation 10/2011 CE
- USA: FDA Regulation 21 CFR 177.1520
- NSF/ANSI Standard 51



 Referred to the Tecklene® polymer

INCLUDED COMPONENTS



EASYFIT

IMPACT GUARDRAIL

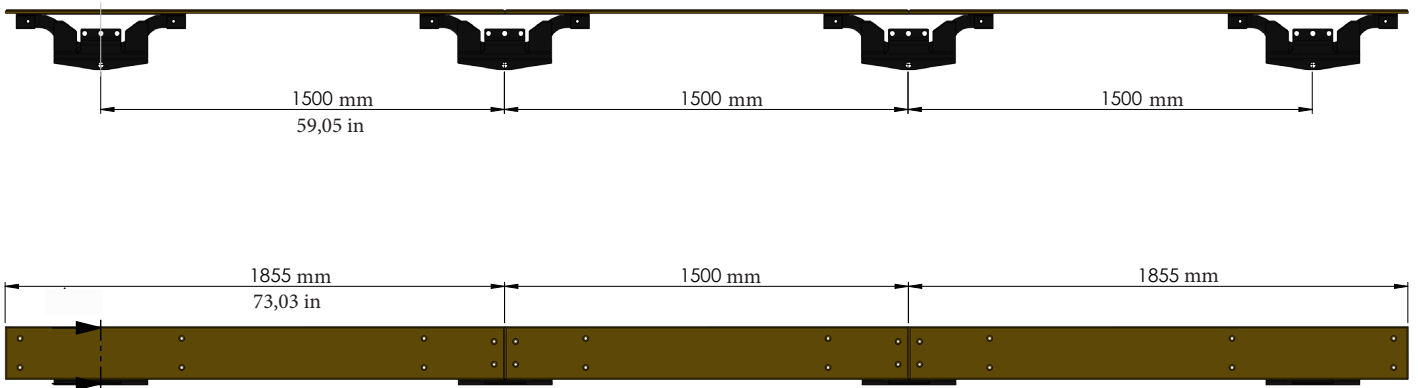

DIMENSIONS

AVAILABLE MODELS*

HEIGHT	LENGTH
total 215 mm 8,46 in	∞ *
of the slab 195 mm 7,67 in	

* length based on the project to be created, it has no maximum lengths.