

EASYFIT

IMPACT PEDESRTIAN RAIL

D140 - H500



TECHNICAL FEATURES

	Material:	Tecklene® (technical polymer)
	Operating temperature:	-40°C ÷ +50°C -40°F ÷ +122°F
	Flame behaviour:	Tecklene® extinguishing degree (UL 94): HB
	UV resistance:	DIN EN ISO 877 7-8 blue scale
	Water Absorption:	0,2%
	Energy Class:	2 - 5000 Joules TESTED and CERTIFIED according to UNI 11886 STANDARD
	Anchoring system:	Metal Plate with 4 dowels

SAFETY COMPLIANCE

- Dir. 89/391/CEE
- dLGS. 81/08 (UNIFIED SAFETY CHARTER)
- UNI/TS 11886-1 2022
- BSI PAS 13:2017
- UNI EN 15512
- Reg. 852/2004/CE

FOOD CONTACT SAFETY

- EU: EC Regulation 10/2011 CE
- USA: FDA Regulation 21 CFR 177.1520
- NSF/ANSI Standard 51

 Referred to the Tecklene® polymer

INCLUDED COMPONENTS

		
Dowel M16 x 137mm	Steel Screw – Black UNI 5933 M14 x 50mm	N. 1 x Closure cap each bollard


EASYFIT




IMPACT PEDESTRIAN RAIL

D140 - H1150


DIMENSIONS

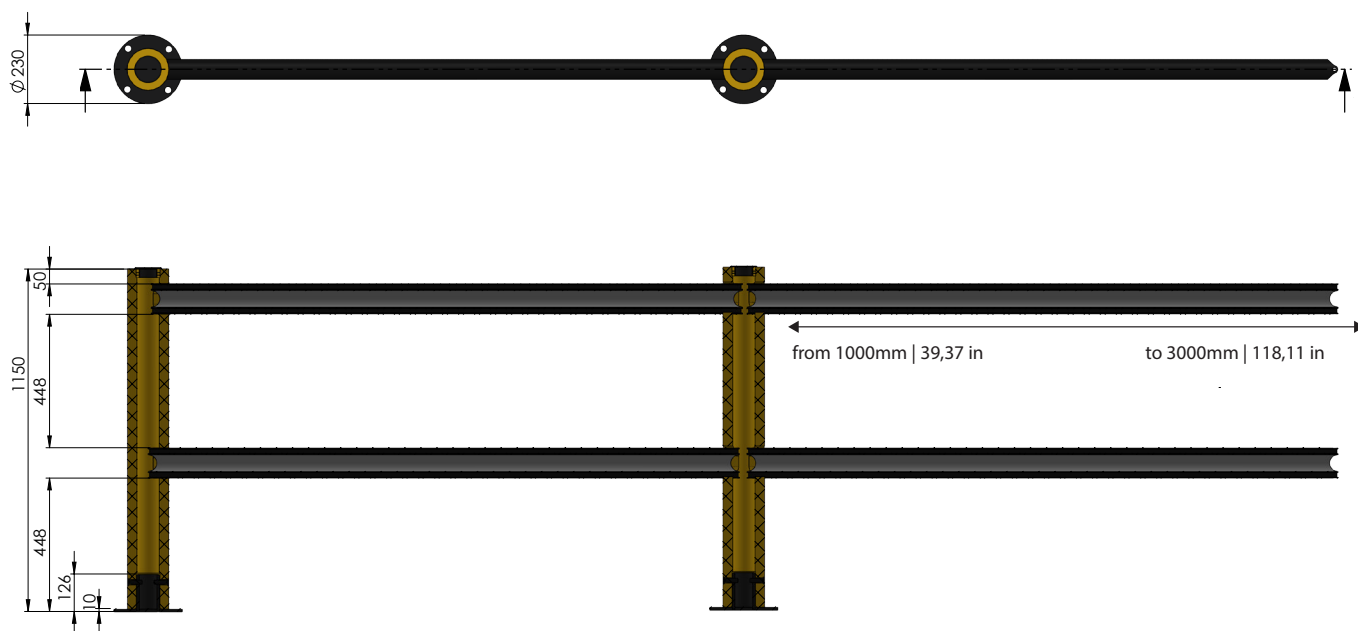


VARIETY OF OTHER OPTIONS OFFERED




START/END
UNIT




EXTENSION
UNIT 180°




EXTENSION
UNIT 90°



EXTENSION
UNIT 135°



TRIPLE START/
END UNIT



QUADRUPLE
START/END UNIT

AVAILABLE MODELS*

HEIGHT

1150 mm | 45,27 in

* other options and models
are available upon request.

